


WHI6SYB

gorenje
Life Simplified

Freestanding wall decorative cooker hood

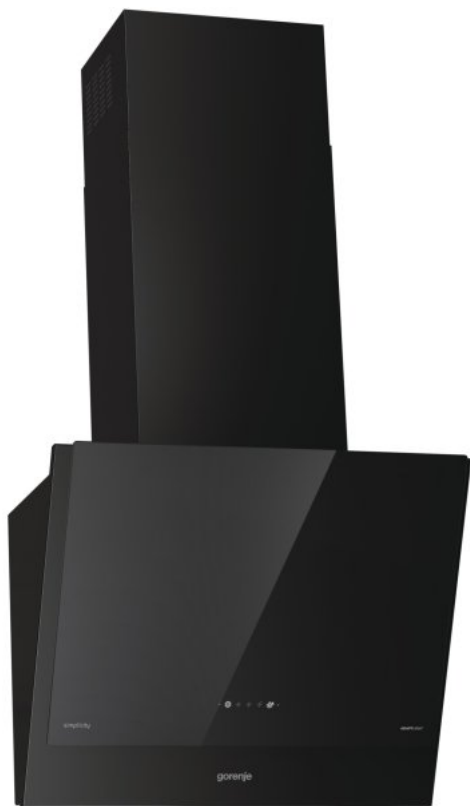

B



AdaptLight



Easy-to-clean filters



OptiStart



P.A.S.



Recirculation mode



Touch control

Wall mounted cooker hood

Venting with air extraction or recirculation

Energy class: **B**

Material of housing/chimney: **Painted steel/glass / varnished steel**

Lightning efficiency class: **A**

Grease filtering efficiency class: **B**

Fluid dynamic efficiency class: **B**

Maximum extraction rate by extraction operation: **650 m³/h**

Maximum extraction rate by recirculation operation: **488 m³/h**

Venting tube diameter: **15 cm**

Air flow by extraction version, step 1: **230 m³/h**

Air flow by extraction version, step 2: **410 m³/h**

Air flow by extraction version, step 3: **650 m³/h**

Electronic control

Control setting: **Touch control**

Number of speed positions: **3**

OptiStart - just one push of the on/off button to start the hood

TouchFree Inox

Lamp type: **LED**

AdaptLight

Number of lights: **2**

Power of lights: **6 W**

Perimetric suction

Filter material: **Washable aluminium with polyurethane foam**

Coal filter code (optional as separate purchase): **688572**

Number of filters: **2**

Recirculation set number: **683035**

Number of motors: **1**

No return airflow flap: **150 mm**

Max. noise level: **67 dB(A)re 1 pW**

Height: **450 mm**

Min. height of the chimney: **650 mm**

Max. height of the chimney: **980 mm**

Annual energy consumption: **66 kWh**

Dimensions (W×H×D): **59.5 × 45 × 38 cm**

Dimensions of packed product (W×H×D): **70.7 × 51.2 × 56.1 cm**

Net weight: **16 kg**

Gross weight: **19.3 kg**

Connected load: **266 W**

Nominal current of fuse: **16 amp**

Product code: **732391**

EAN code: **3838782165436**



<https://international.gorenje.com/product/732391>